


SURFACE MONITOR/SEARCH TOOL

Model # TBM-6SP-ST

FEATURES:

- TWO SEPARATE DETECTORS:
EXTERNAL - SCINTILLATOR 1" x 1" NaI(Tl)
INTERNAL - PANCAKE GEIGER
- LIGHTWEIGHT - FITS IN YOUR BRIEFCASE

DESCRIPTION: The **TBM-6SP-ST** features an internally mounted 2 inch pancake GM detector with window looking downward from bottom of case and an External Model PGS-3 1" x 1" scintillation probe for use as a Gamma Search Tool and μ R Meter. A sliding shield protects pancake detector when not in use. This system is half the weight of other systems.

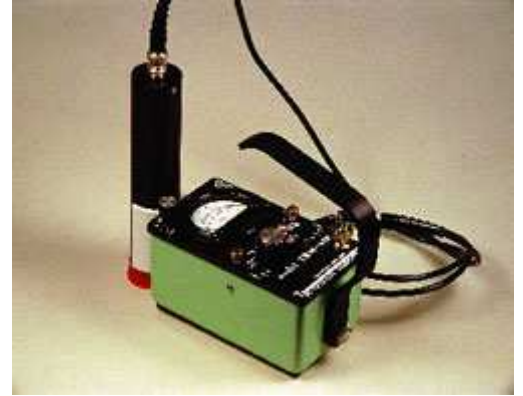

SPECIFICATIONS:

TBM-6SP-ST

- **Meter:** Rugged, recessed 2-1/2" meter.
- **RangeSwitchPositions:** Off; Battery Test; X1; X10; X100; X1,000.
- **Ranges:** 4 linear ranges for each detector: 0-500; 5,000; 50,000; 500,000 cpm for external and 0-0.15; 1.5; 15; 150 mR/hr. for internal detector. Other scales and overlays available: Sieverts, etc.
- **DetectorSwitch(Toggle):** Internal (pancake), External (scintillator)
- **TimeConstantSwitch:** Fast, Slow (approx. 2 & 11 sec.)
- **Detectors:** 2" O.D. Pancake Geiger for internal and PGS-3 1" diameter by 1" thick crystal scintillation probe with 40" removable cable for external. NaI(Tl) crystal standard. **Optional** BGO crystal .
- **Efficiency:**

BETA Pancake	C ¹⁴	40%	P ³²	98%	Exclusive of any geometry factor
GAMMA	I ¹³¹	77%	Co ⁶⁰	38%	Exclusive of any geometry factor
Scintillation	Tc ^{99m}	99%	Cs ¹³⁷	50%	Exclusive of any geometry factor

- **Calibration:** Single master Cal Pot for each detector, plus individual Cal Pot for each scale. Pots adjust from outside case.
- **Power:** 9V Transistor battery (Eveready E1220 or equivalent). Battery life - 100 hrs. norm. operation.
- **Dimensions:** 3" wide x 5-1/4" long x 2-1/4" deep. (7.6 cm x 13.3 cm x 6 cm).Excluding External Probe.
- **TotalWeight:** 2.5 lbs. (including probe and battery)

元翔五金行 電話：04-22615775 傳真：04-22621395

住址：台中市復興路二段 120 之 19 號 <http://yuansum.myweb.hinet.net>